



CCTV Truer than life

**EP Series
High Speed Dome**

► **Key Features:**

- Day night + ICR, 480 TVLines of horizontal resolution
- 1/4" Sony exview HAD CCD, 26X optical zoom (12X digital zoom) f=3.5mm (wide) - 91.0mm (tele) F1.6-3.8
- 7 alarm inputs, 2 outputs
- 220 presets with editable time
- 8 programmable zones / 8 privacy masking zones
- 4 Pannings with up to 355 degrees scan range
- 4 Sequences, each one with up to 32 presets, dwell time can be set
- 4 pattrern tours, each one with up to 180 seconds of recording
- Supports multiple Protocols: Pelco P/D, Vicon, Kalatel, Ernitec, Panasonic & more...
- Built-in 1500W lightning proof and surge proof

► **Technical Specifications:**


Model	EP-908
Image Sensor	1/4" SONY Exview HAD CCD
Horizontal Resolution	Color: More than 480 TV lines B/W: More than 600 TV lines
Synchronization	Internal / External V-lock
Optical Lens	26X Optical Zoom, f=3.5mm (wide) - 91.0mm (tele), F1.6 to F3.8
Digital Zoom	12X (312x with optical zoom)
Minimum Working Distance	320mm (wide end) to 1500mm (tele end)
Video Output	1.0Vp-p (sync negative)
Gain Control	Auto / manual (-3 to 28dB, 16 steps)
Minimum Illumination	1.0 Lux / 0.01 Lux with ICR-ON
S/N ratio	> 50dB
White Balance	Auto , ATW, Indoor, Outdoor, One Push WB, Manual WB
BLC	On/OFF
ELC	Auto: 1/50 - 1/10,000 sec. ; Manual : 22 steps
White Balance	Auto (3000°K - 7500°K) ATW (2000°K - 10,000°K) Indoor Outdoor One-push Manual
AE Compensation	Auto, Manual, Backlight compensation, EV compensation, priority mode, Bright



† Wall mount Option

► **Product Numbers:**

- FN55EPQ908A

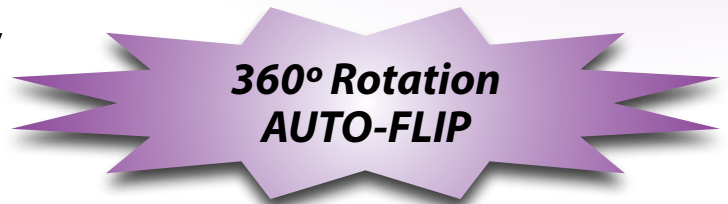


EV Compensation	-10.5 - +10.5dB (1.5 dBsteps)
Focusing System	Auto (sensitivity: normal, low), One-push AF, manual, Infinity, Interval AF, Zoom Trigger AF
Day Night Function	Yes, with ICR Cut Filter
Preset	220 Positions
Focus	Auto / Manual
OSD Language	English, Italian, Spanish, German, French & Russian
Operating Temperature	Indoor: -10° + 50° C (14° to 122° F) Outdoor: -40° to + 70° C (-40° to 158°) F
Storage Temperature	-20° to + 60° C (-4°+140° F)
Power Supply	AC24V, 50/60Hz
Power Consumption	Indoor 10W, outdoor 50W

► **Movement Range:**

Pan Range	360° continuous
Tilt Range	90°
Manual Pan Speed	0.1- 160 degree/ sec.
Manual Titl Speed	0.1-160 degree/ sec.
Preset Speeds	Pan: more than 360 degrees/sec., tilt: more than 360 degrees/sec.

Design and specifications are subject to change without notice.

Accessories

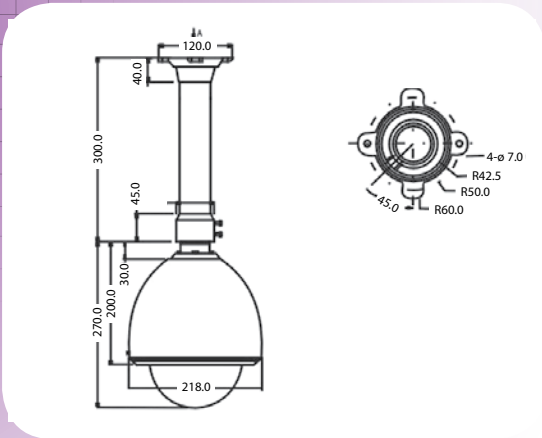

► Product Number:

• FN55EPP805

Pendant Mount Bracket

Specifications:

- material: Aluminum
- weight: 1.3Kg





► Product Number:

• FN55EPW804

Wall Mount Bracket

Specifications:

- material: Aluminum
- weight: 1.2Kg

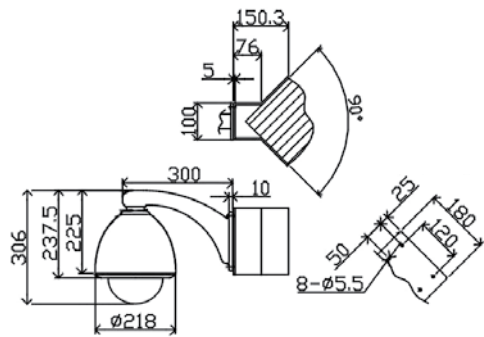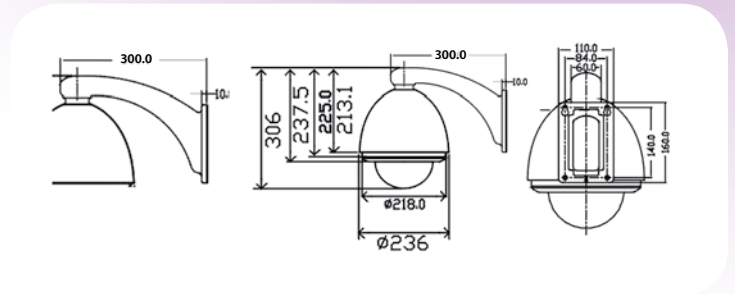


► Product Number:

• FN55EC01

Corner Mount Bracket

Specifications:

- material: Aluminum
- weight: 2Kg

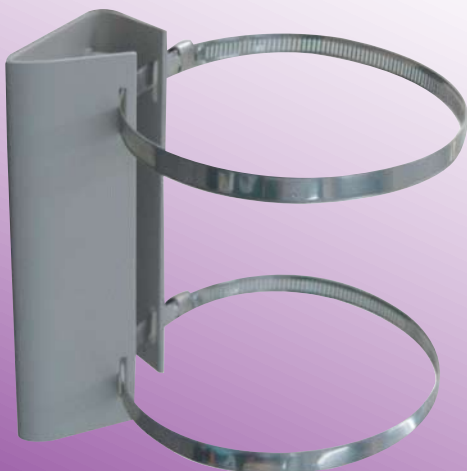

► Product Number:

• FN55EPP02

Pole Mount Bracket

Specifications:

- material: Aluminum
- weight: 1.1Kg

