



CCTV Truer than life

**Day & Night, IR Cut Filter
Bullet Camera**

► **Key Features:**

- IP68 Rated waterproof housing
- Aesthetically appealing with concealed wiring in the back of camera body for easy installation
- Lens is adjustable from exterior of housing
- Horizontal resolution of 420 TV lines / 540 TV lines
- Build in varifocal lens F1.8 or 4~9mm/ 9~22mm/F1.8 lens
- With effective distance of up to 45 M indoor / outdoor range
- Ideal camera for all day and night surveillance
- Non-condensed glass
- Featuring IR cut built in mechanism





► **Product Numbers:**

- FN55ICX4VIR720
- FN55ICX4VIR800
- FN55ICX9VIR720
- FN55ICX9VIR800

► **Technical Specifications:**

• Model	ICX-4VIR720/ ICX-9VIR720 ICX-4VIR800/ ICX-9VIR800
• Effective Pixels 1/3" Image CCD Sensor	ICX-4VIR720/ ICX-9VIR720: NTSC:512(H) x 492(V) ICX-4VIR800/ ICX-9VIR800: NTSC:771(H) x 492(V)
• Horizontal resolution	ICX-4VIR720/ ICX-9VIR720:420TV Lines ICX-4VIR800/ ICX-9VIR800: 540TV Lines
• Minimum Illumination	0.5 Lux F2.0, day mode, 0 Lux night mode(with ICR filter)
• S/N Ratio	More than 48dB(AGC Off)
• Electronic Shutter	1/60(1/50) to 1/100,000 sec
• Gamma correction	0.45
• White Balance	Auto
• Video Output	1.0Vp-p composite, 75 ohm
• Day & Night	Yes, ICR CUT Removable Filter for Switching to Color or Monochrome
• Lens	Varifocal 4~9mm/F1.8 Lens: ICX-4VIR720, ICX-4VIR800 Varifocal 9~22mm /F1.8 Lens: ICX-9VIR720, ICX-9VIR800
• BLC	Auto
• IR LED Unit	56 pieces
• IR Distance	up to 45 Meters
• IR Spectrum	850nm
• IP Rated	IP 68
• Storage Temperature	-30° to +60° C
• Operating Temperature	-20° to +50° C
• Power Source	DC12V±10%
• Power Consumption	130mA(IR OFF), 610mA(IR ON)
• Dimensions	200(L) x 87(W) x 100(H) mm
• Weight	1230g

► **Physical Dimensions:**

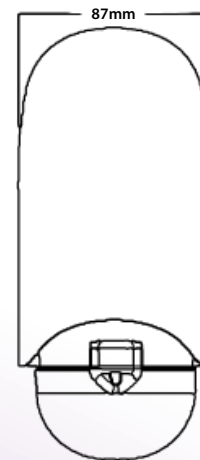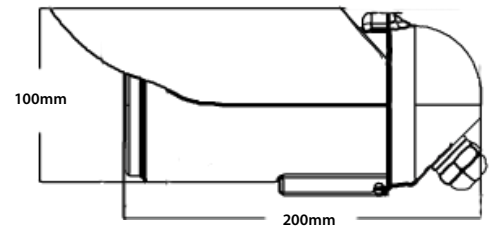

Design and specifications are subject to change without notice.