



Infrared Bullet Camera

B8VFIRHD



This innovative outdoor bullet camera produces a full HD 1080P image with a 2.2MP Sensor, perfect for outdoor use in darker area, its adjustment can be optimized with its 2 easy to access back buttons!

HD-SDI

Following our mission to provide you with the latest cost effective solution in Video surveillance, JAD is introducing HD CCTV (HD-SDI) a unique technology fulfilling a need and providing Full 1080p HD video on your existing coaxial installation.

This technology is using a SMPTE signal in order to transmit a numeric signal over coaxial cable.

IP68

In order to provide the most resistant product, this model was tested with the most strict and impact resistant rules in the industry.

Smart LED

Choosing the right camera to use in an area of low light is not an easy task! To improve the performance of HD SDI series cameras, this model is fitted with infrared LED that have a range of 100 meters and IR Smart function which automatically adjusts the intensity of the LEDs depending on the lighting conditions of the area.

HD SDI



FEATURES



- 1/3 INCH SONY CMOS
- HD-SDI (1080P, 720P) / High Resolution (1000 TV Line OVER)
- HD-SDI (High Definition Serial Digital Interface) / 0 Lux at IR On (IR LED 70pcs)
- Upgraded Waterproof Housing (IP68 rating) / Smart IR / True Day & Night(ICR)
- WDR (Wide Dynamic Range) / DNR (Digital Noise Reduction)
- DC Auto IRIS & V/F Lens 2.8~12mm
- Easy rear access buttons for zoom & focus adjustment



Transmission over
Coaxial cable

SPECIFICATIONS

Resolution	HD-SDI(1080P, 720P) / 1000 TV Line Over
Sensor	1/3 Inch Sony CMOS
Lens	2.8~12mm varifocal
Total Pixels	2010(H) X 1108(V) = 2,227,080
Effective Pixels	1944(H) X 1092(V) = 2,122,648
Scanning System	Progressive
S/N (Y signal)	More than 52 dB (AGC Off)
Video Output	SMPTE292M (HD-SDI) / CVBS: 1.0Vp-p (75ohm)
Minimum Illumination	0 Lux at IR On
White Balance	Auto / Auto Ext / Manual
Electronic shutter speed	Auto / Manual (1/30Sec ~ 1/30,000Sec)
Brightness	Adjustable (0 ~ 20 Step)
SENS_UP	Off / X2 / X3 / X4
DNR	Off / Low / Middle / Hi
WDR/BLC	Off / Wdr / Blc
HLM	Off / Set
ACE	Off / On
Day & Night	Auto (Day <--> Night TIME Change) , Color , B/W, Extern, MDIR
Smart IR	Off / On
Privacy	Off / On (28 Zone)
Motion Detection	Off / On
Digital Zoom	0 ~ X112
Flip	Off / On
Freeze	Off / On
Language	English
Sharpness	Adjustable (0 ~ 10 Step)
Image Conversion	Off / On
Communication	RS-485(PELCO-D)
Operating Temperature/Humidity	-10°C~+50°C / 30%~80% RH
Power	DC12V ±10%

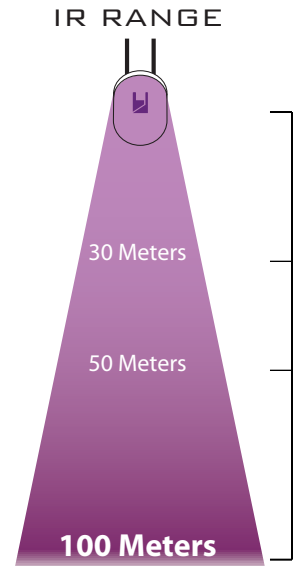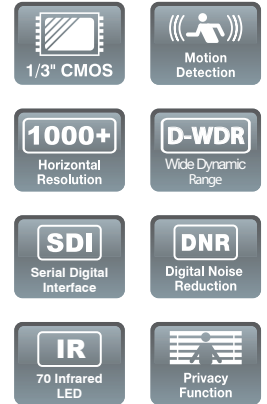

DIMENSIONS

