



CCTV Truer than life

Tri-Axis Vandal Dome with DELs



► **Key Features:**

- Compact & Vandal Resistant Construction
- Suitable for indoor and outdoor (optional wall mount)
- Day / night
- IP 66 Rated
- Tamper proof screws
- Integration of varifocal DC iris lens 3.5 ~ 9.5 mm or 9 ~ 22 mm
- Fitted with LED illuminators for night time surveillance

► **Product Numbers:**

- FN55VD3VIR420D
- FN55VD3VIR540SH
- FN55VD9VIR420SP
- FN55VD9VIR525SH

► **Technical Specifications:**


• Model	VD-3VIR420 VD-9VIR420	VD-3VIR480	VD-9VIR525
• Image Sensor	1/3 High performance CCD		
• Horizontal resolution	420 TVL	480 TVL	540 TVL
• Effective Pixels	NTSC: 510 (H) x 492 (V) / NTSC: 771 (H) x 492 (V)		
• Scanning System	2:1 Interlace V: 60Hz, H: 15.750KHz		
• Synchronization	DC: Internal, AC: Linelock (option)		
• Video Output	1 Vp-p, 75 ohms unbalanced		
• Minimum Illumination	0.01 Lux F1.4	0.01 Lux F1.4	0.01 Lux F1.4
• Electronic Shutter	Auto		
• BLC	Auto, center area		
• Gamma Correction	0.45		
• White Balance	Auto Tracking 2500°K -9500°K		
• Gain Control	Auto		
• IR Effective Range	20 Meters		
• Day & Night	Color to monochrome		
• Lens	3VIR » 3.5~9.5mm Varifocal DC Iris 9VIR » 9~22mm Varifocal DC Iris		
• Operating Temperature	-20°C ~ +45°C		
• Power Supply	DC12V±20%		
• Power Consumption	IR off: 250mA / IR on 600mA		
• Dimensions	170.45 mm x 79 mm		
• Weight	750g		

► **Wall Mount (Optional):**

- FN55VDB03



► **Physical Dimensions:**

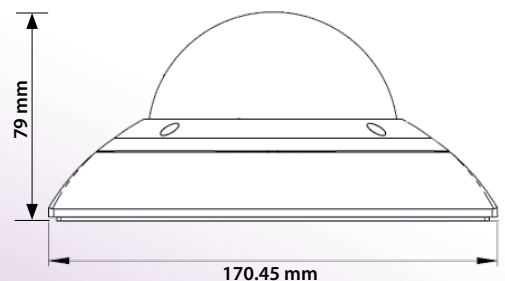

Design and specifications are subject to change without notice.